


Standard Vinyl Selector



MOVEABLE WALL SYSTEMS




A Division of KWIK-WALL.

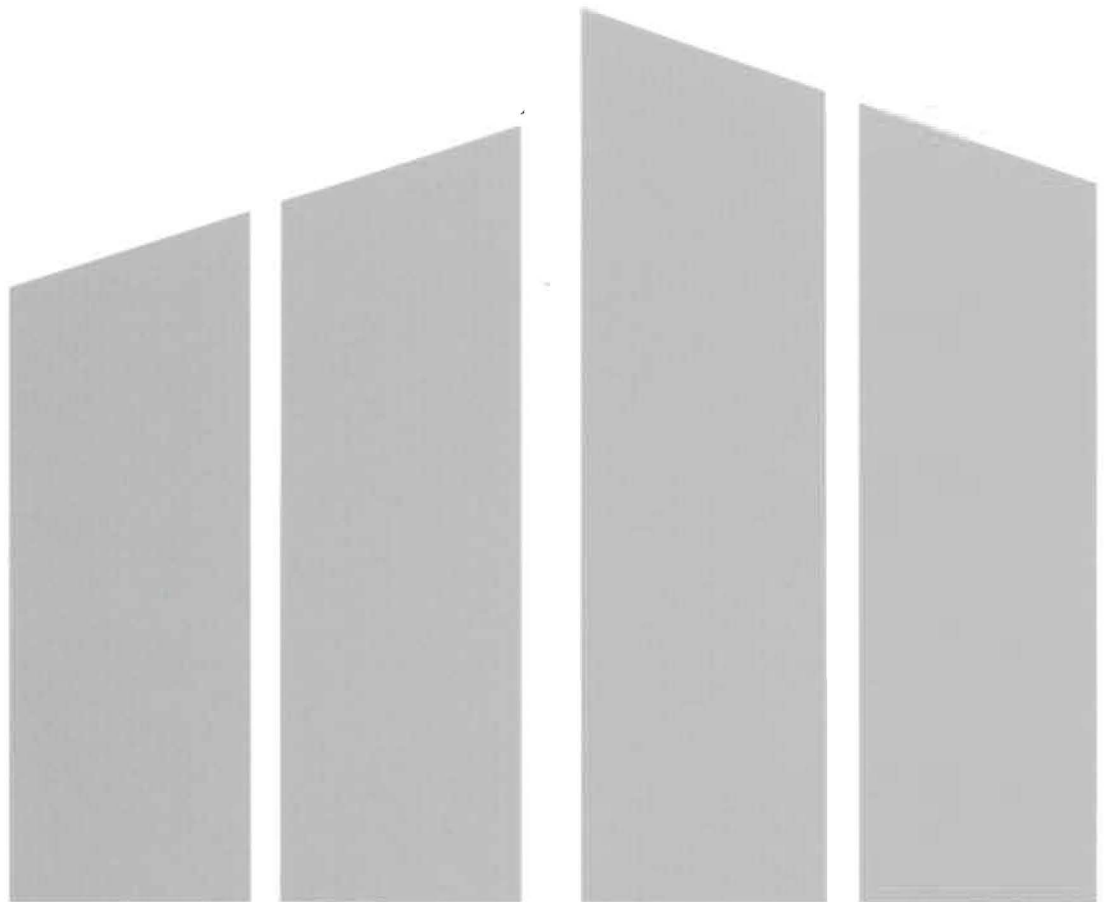

CHOOSE QUALITY. CHOOSE EXCELLENCE. **CHOOSE KWIK-WALL.**

Kwik-Wall

Lino®

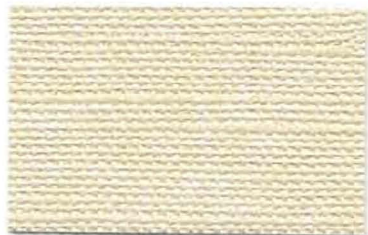

KW-1 Snow



KW-2 Winter White



KW-3 Skylight



KW-4 Beach Basket



KW-5 Cirrus



KW-6 Sausalito

Desert Sand®



KW-7 Silk



KW-8 Bisque



KW-9 Cashmere



KW-10 Winter Gray



KW-11 Cream Beige



KW-12 Dry Sage


Harborweave®



KW-13 Atrium




KW-14 Winter Mist

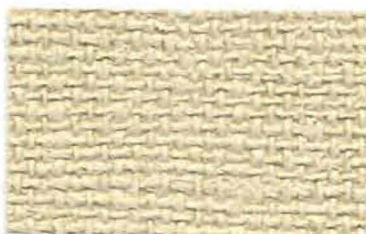

KW-15 Crystal Beach



KW-16 Gray Feather

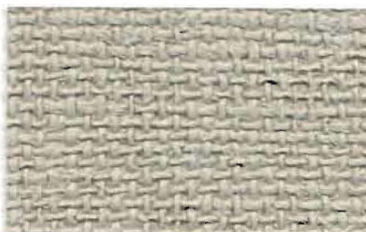

KW-17 Sea Beach



KW-18 Breakwater

Collage®



KW-19 Marble



KW-20 Cascade



KW-21 Dawn Mist



KW-22 Grotto




KW-23 Hearthstone



KW-24 Dusty Trail

Traces®

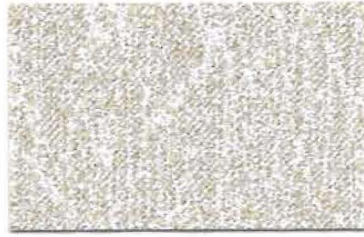

KW-25 Cherrystone



KW-26 Lemon Twist



KW-27 Caraway



KW-28 Mustard



KW-29 Wheat Germ



KW-30 Pesto

Raphael®



KW-31 Antique White



KW-32 Morocco



KW-33 Creme Brulee



KW-34 Crystal




KW-35 Canvas



KW-36 Ashlar

Standard Offering

Mayan®

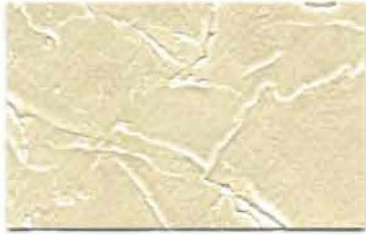

KW-37 Sage



KW-38 Rice Paper



KW-39 Light Opal



KW-40 Mineral Tint



KW-41 Light Bamboo




KW-42 Rainforest

Matrix®



KW-43 Pacific Pearl

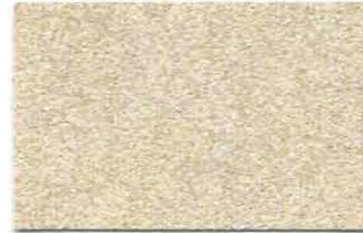

KW-44 Ivory Matrix



KW-45 Desert Jasper



KW-46 Sea Glass



KW-47 Coral Reef



KW-48 Riverstone

Chimayo®



KW-49 Tierra Blanca



KW-50 Cordova



KW-51 Tierra Bayita



KW-52 Salsa



KW-53 Sage Brush



KW-54 Cactus



Kwik-Wall

MOVEABLE WALL SYSTEMS

Patterns and Colors shown on this card are provided as standard selections to expedite the production of walls

Patterns and Colors not shown on this card may be submitted to KWIK-WALL for approval

All patterns shown here are manufactured in both Type I and Type II

Flat panel walls will use Type I material as a standard

Accordion walls will use Type II material as a standard

Please refer to the KWIK-WALL Premium Pattern Collection for additional Type II selections

www.kwik-wall.com

TYPE I

TYPE II

	U.S. UNITS	METRIC UNITS	U.S. UNITS	METRIC UNITS
Total Weight	15.0 oz PLY	465g PLM	21.0 oz PLY	651g PLM
Roll Width	53/54 in.	134/137 cm	53/54 in.	134/137 cm
Gauge	20 Mils	0.51 mm	24 Mils	0.61 mm
Fabric	Sheeting		Osnaburg	
Tensile (Min.)	40 x 30 lbf	178 x 133 N	50 x 55 lbf	222 x 245 N
Tear (Min.)	14 x 12		25 x 25	
Federal Spec	CCC-W-408A, Type I		CCC-W-408A, Type II	
CFAA Spec	CFFA-W-101-D, Type I		CFFA-W-101-D, Type II	
Fire Testing	NFPA 101*, Life Safety Code* NFPA 255 (UL 723, CAN S102M) Tunnel Test ¹ Class A Rating NFPA 286 Corner Burn Test ² Meets requirements for Flame Spread, Smoke Developed and Flashover U.L. Labeled and Listed		NFPA 101*, Life Safety Code* NFPA 255 (UL 723, CAN S102M) Tunnel Test ¹ Class A Rating NFPA 286 Corner Burn Test ² Meets requirements for Flame Spread, Smoke Developed and Flashover U.L. Labeled and Listed	
Repeat	Vertical Horizontal Match information	N/A N/A Random Match, Reverse Hang	Vertical Horizontal Match information	N/A N/A Random Match, Reverse Hang

¹ When applied to GRC board with A-848-B adhesive

² When applied to 5/8" type-X-gypsum board with A-848-B adhesive

The flammability testing data, conclusions and recommendations in this report relate solely to measurement and description of the properties of materials, products, or systems in response to the heat and flame under controlled laboratory conditions and should not be considered or used for the description, appraisal, or regulations of the fire hazard of materials, products, or systems under actual fire conditions.

1010 East Edwards St., Springfield, IL 62703 • 800-280-5945 • www.kwik-wall.com

